

Specifications:

Description:

Halius Bensol led wall mount light with high quality led technology. It provides high lumen output, Eco friendly solution and its compact size makes it easy to install. Excellent heat dissipation, Frosted glass diffuser offering uniform and comfortable light.

Construction:

- Iron + Glass construction with a powder coat paint finish.
- Rigid Construction.
- Uniform light distribution.
- Compact size and easy installation.
- Elegant look.

Performance:


Input Power	45W
Voltage Input	AC220-240V
Frequency	50-60 Hz
Lumens/LPW	3600lm/80lm/W
CCT	3000K
CRI	80 +
Life	50000hrs
UGR	<10
Min. Start Temp Max. Operating Temp	-20° C to 45° C
Warranty	5yrs
Labels	CE, ROHS

HL-LTG-O-WL-BENS-S-45W-3000K-ASYD-B-ND

Images:



Dimensions:

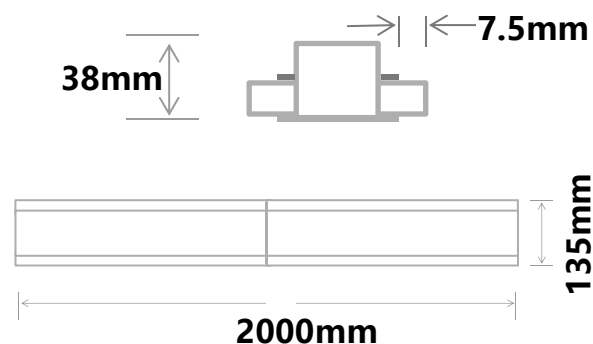

Catalog number:

Eg: HL-LTG-O-WL-BENS-S-45W-3000K-ASYD-B-ND

B-Black

W-White

HL-LTG-O-WL-BENS-S-45W -xxxxK - xxD - x - xx

CCT	Beam	Finish	ND-Non Dimming
3000K	ASY	B	DI-Dimming
4000K		W	
6000K			

HL-LTG-O-WL-BENS-S-45W-3000K-ASYD-B-ND

Electrical Data

Driver Inc.	Yes
Dimming/Dimming option	No/Phase cut Constant
Driver type	Current
PF	>0.9
THD	≤ 20%

Mechanical Data

Length	2000mm
Width	135mm
Height	38mm
Material	Iron + Glass
Fixed/Adjustable	Fixed
Adjustable angle	Nil
Finish	White/Black

Optical Data

Chip	CREE
Beam Angle	Asymmetrical
SDCM(Macadam step)	< 3
CRI	>80 +
CCT	3000K/4000K/6000K
Life Span	50000Hrs
Luminaire Efficiency(lm/W)	80lm/W
Luminaire Lumen(lm)	3600lm

Thermal Data

Working Temperature	-20° C to 45° C
Storage Temperature	-20°C to 60°C


Safety Data

IP	IP65
Safety Class	Class II
ROHS	YES


Photometrics

HL-LTG-O-WL-BENS-S-45W-3000K-ASYD-B-ND

LED Light Engine: 3000K, 80 CRI System Wattage: 45W
Fixture Delivered Lumens: 3600lm Fixture Efficacy: 80lm/W

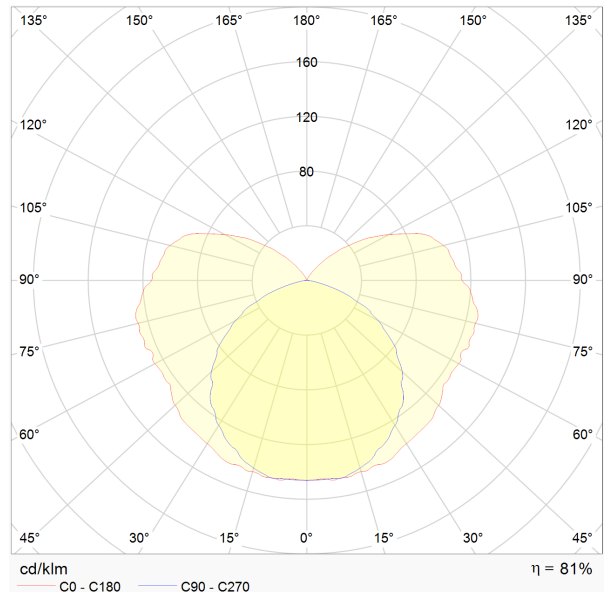

Cartesian Diagram

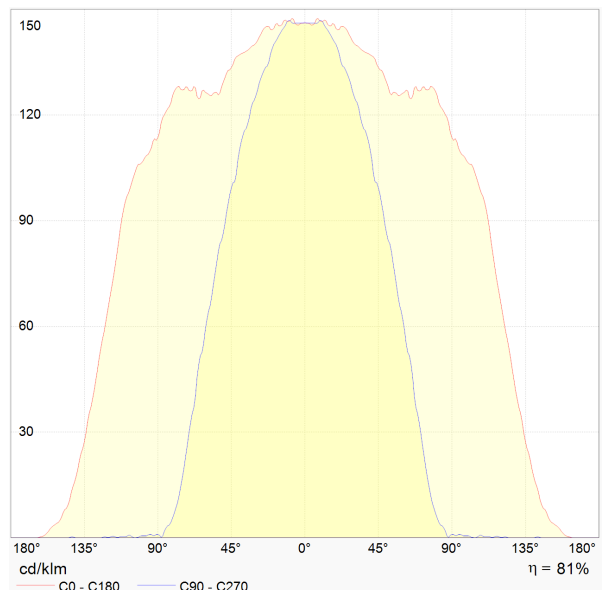

***Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. ***Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.