

Diam Pro

125mm Recessed LED Down light 30W 4000K

Specifications:

Description:

Halius Diam Pro Recessed Fixed LED down Light with high quality led technology. It provides high lumen output, Eco friendly solution and its compact size makes it easy to install. Excellent heat dissipation, Various Reflector, offering uniform and comfortable light.

Construction:

- Die-cast aluminum construction with a powder coat paint finish.
- Rigid Construction.
- Uniform light distribution.
- Compact size and easy installation.
- Elegant look.

Performance:


Input Power	30W
Voltage Input	AC220-240V
Freequency	50-60 Hz
Lumens/LPW	3000lm/100lm/W
CCT	4000K
CRI	80 +
Klled	50000hrs
UGR	<20
Min. Start Temp Max. Operating Temp	-20° C to 45° C
Warranty	5yrs
Labels	CE, ROHS

HL-LTG-I-FDL-DIAMP-030W-4000K-45D-W-ND

Images:



Dimensions:

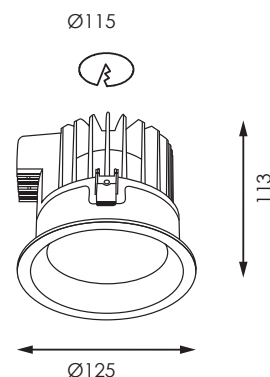

Catalog number:

Eg: HL-LTG-I-FDL-DIAMP-030W-4000K-45D-W-ND

B-Black

W-White

HL-LTG-I-FDL-DIAM-030W- -xxxxK - xxD - x - xx

CCT	Beam	Finish	ND-Non Dimming
3000K	30°	B	DI-Dimming
4000K	45°	W	
6000K	60°		

HL-LTG-I-FDL-DIAMP-030W-4000K-45D-W-ND

Electrical Data

Driver Inc.	Yes
Dimming/Dimming option	Yes/DALI
Driver type	Constant Current
PF	>0.9
THD	≤ 20%

Mechanical Data

Diameter	125mm
Height	113mm
Cut Out	115mm
Material	Diecast Aluminum
Fixed/Adjustable	Fixed
Adjustable angle	Nil
Finish	White/Black

Optical Data

Chip	CREE
Beam Angle	15°, 30°, 45°, 65°
SDCM(Macadam step)	< 3
CRI	>80+
CCT	3000K/4000K/6000K
Life Span	50000Hrs
Luminaire Efficiency(lm/W)	100lm/W
Luminaire Lumen(lm)	3000lm

Thermal Data

Working Temperature	-20° C to 45° C
Storage Temperature	-20°C to 60°C


Safety Data

IP	IP40
Safety Class	Class II
CE	YES
ROHS	YES

Photometrics

HL-LTG-I-FDL-DIAMP-030W-4000K-45D-W-ND

LED Light Engine: 4000K, 80 CRI System Wattage: 30W
Fixture Delivered Lumens: 3000lm Fixture Efficacy:
100lm/W

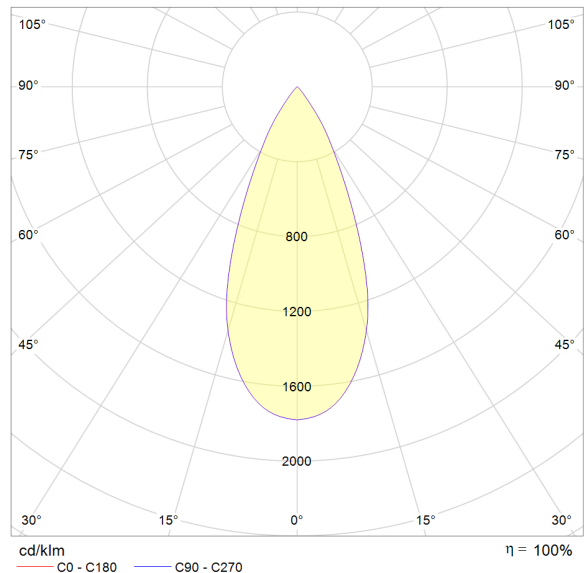

Cone Diagram

Distance [m]	Cone Diameter [m]	Illuminance [lx]
0.5	0.41	E(0°) 18154 E(C0) 7239
1.0	0.81	E(0°) 4538 E(C0) 1810
1.5	1.22	E(0°) 2017 E(C0) 804
2.0	1.62	E(0°) 1135 E(C0) 452
2.5	2.03	E(0°) 726 E(C0) 290
3.0	2.44	E(0°) 504 E(C0) 201

***Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. ***Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.