

Specifications:

Description:

Halius Kormo LED wall Light with high quality led technology. It provides high lumen output, Eco friendly solution and its compact size makes it easy to install. Excellent heat dissipation, rectangular shape, offering ambient and comfortable light.

Construction:

- Die-cast aluminum construction with a powder coat paint finish.
- Rigid Construction.
- Uniform light distribution.
- Compact size and easy installation.
- Elegant look.

Performance:



Input Power	12W
Voltage Input	AC220-240V
Freequency	50-60 Hz
Lumens	490lm
CCT	3000K
CRI	80+
Klled	30000hrs
UGR	<20
Min. Start Temp Max. Operating Temp	-20° C to 40° C
Warranty	3yrs
IP	20

HL-LTG-I-WL-KORM-S-12W-3000K-ASYD-SW-ND

Images:



Dimensions:

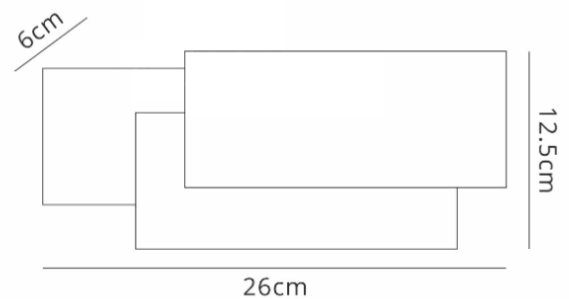

Catalog number:

Eg: HL-LTG-I-WL-KORM-S-12W-3000K-ASYD-SW-ND

SW-Sand White

HL-LTG-I-WL-KORM-S-12W- -xxxxK - xxD - x - xx

CCT Beam Finish ND-Non Dimming
3000K ASY SW DI-Dimming

HL-LTG-I-WL-KORM-S-12W-3000K-ASYD-SW-ND

Electrical Data

Driver Inc.	Yes
Dimming	No/
Driver type	Constant Current

Mechanical Data

Length	260mm
Width	125mm
Height	60mm
Material	Dicast Aluminum
Fixed/Adjustable	Fixed
Adjustable angle	Nil
Finish	Sand White

Optical Data

Chip	CREE/Osram
Beam Angle	Asymmetrical
SDCM(Macadam step)	< 5
CRI	>80+
CCT	3000K
Life Span	30000Hrs
Luminaire Efficiency(lm/W)	40.83lm/W
Luminaire Lumen(lm)	490lm

Thermal Data

Working Temperature	-20° C to 45° C
Storage Temperature	-20°C to 60°C


Safety Data

IP	IP20
Safety Class	Class II
ROHS	YES


Photometrics

HL-LTG-I-WL-KORM-S-12W-3000K-ASYD-SW-ND

LED Light Engine: 3000K, 80 CRI System Wattage: 12W
 Fixture Delivered Lumens: 490lm Fixture Efficacy:
 40.83lm/W

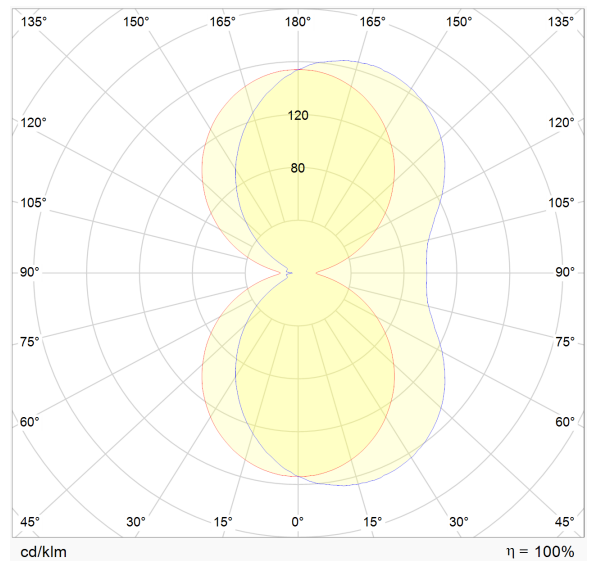

Cartesian Diagram

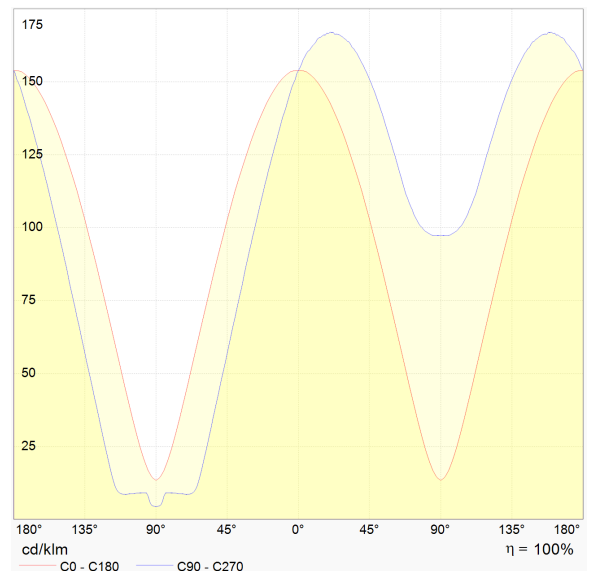

***Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. ***Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.