

Specifications:

Description:

Halius Lena Recessed Fixed LED spot Light with high quality led technology. It provides high lumen output, Eco friendly solution and its compact size makes it easy to install. Excellent heat dissipation, Various Reflector, offering uniform and comfortable light.

Construction:

- Die-cast aluminum construction with a powder coat paint finish.
- Rigid Construction.
- Uniform light distribution.
- Compact size and easy installation.
- Elegant look.


Performance:

Input Power	10W
Voltage Input	AC220-240V
Freequency	50-60 Hz
Lumens/LPW	960lm/96lm/W
CCT	3000K
CRI	80 +
Klled	50000hrs
UGR	<20
Min. Start Temp Max. Operating Temp	-20° C to 45° C
Warranty	5yrs
Labels	CE, ROHS

Images:



Dimensions:

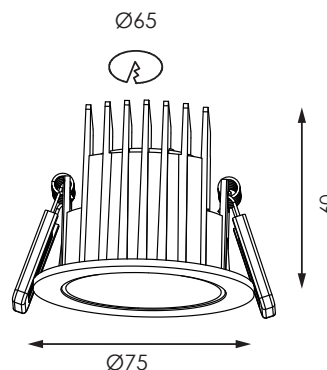

Catalog number:

Eg: HL-LTG-I-FSP-LENA-010W-3000K-60D-W-DI

HL-LTG-I-FSP-LENA-010W- -xxxxK - xxD - x - xx

B-Black

W-White

CCT	Beam	Finish	Dimming
3000K	24°	B	DI-Dimming
4000K	36°	W	
6000K	60°		

HL-LTG-I-FSP-LENA-010W-3000K-60D-W-DI

Electrical Data

Driver Inc.	Yes
Dimming/Dimming option	No/DALI,1-10V,Phase cut
Driver type	Constant Current
PF	>0.9
THD	≤ 20%

Mechanical Data

Diameter	75mm
Height	60mm
Cut Out	65mm
Material	Dicast Aluminum
Fixed/Adjustable	Fixed
Adjustable angle	Nil
Finish	White/Black

Optical Data

Chip	CREE
Beam Angle	24°, 36°, 60°
SDCM(Macadam step)	< 3
CRI	>80+
CCT	3000K/4000K/6000K
Life Span	50000Hrs
Luminaire Efficiency(lm/W)	96lm/W
Luminaire Lumen(lm)	960lm

Thermal Data

Working Temperature	-20° C to 45° C
Storage Temperature	-20° C to 60° C


Safety Data

IP	IP20
Safety Class	Class II
CE	YES
ROHS	YES

Photometrics

HL-LTG-I-FSP-LENA-010W-3000K-60D-W-DI

LED Light Engine: 3000K, 80 CRI System Wattage: 10W
Fixture Delivered Lumens: 960lm Fixture Efficacy: 96lm/W

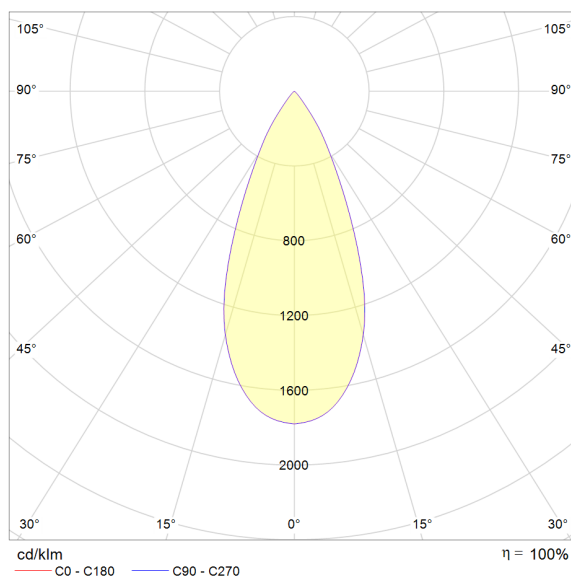

Cone Diagram

Distance [m]	Cone Diameter [m]	Illuminance [lx]	E(0°) E(C0)	22.1°
0.5	0.41	6834 2725	E(0°) E(C0)	22.1°
1.0	0.81	1709 681	E(0°) E(C0)	22.1°
1.5	1.22	769 303	E(0°) E(C0)	22.1°
2.0	1.62	427 170	E(0°) E(C0)	22.1°
2.5	2.03	273 109	E(0°) E(C0)	22.1°
3.0	2.44	190 76	E(0°) E(C0)	22.1°

***Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. ***Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.