

Specifications:

Description:

Halius Cataleya Recessed Fixed LED down Light with high quality led technology. It provides high lumen output, Eco friendly solution and its compact size makes it easy to install. Excellent heat dissipation, Various Reflector, offering uniform and comfortable light.

Construction:

- Die-cast aluminum construction with a powder coat paint finish.
- Rigid Construction.
- Uniform light distribution.
- Compact size and easy installation.
- Elegant look.

Performance:


Input Power	10W
Voltage Input	AC220-240V
Freequency	50-60 Hz
Lumens/LPW	900lm/90lm/W
CCT	4000K
CRI	80 +
Kied	50000hrs
UGR	<20
Min. Start Temp Max. Operating Temp	-20° C to 45° C
Warranty	5yrs
Labels	CE, ROHS

HL-LTG-I-FDL-CATEL-R-10W-4000K-55D-W-ND

Images:



Dimensions:

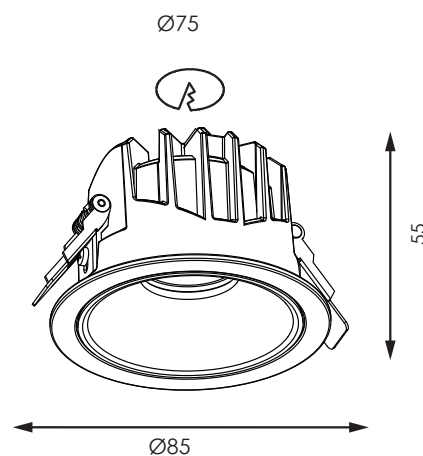

Catalog number:

Eg: HL-LTG-I-FDL-CATEL-R-10W-3000K-55D-W-ND

B-Black

W-White

HL-LTG-I-FDL-CATEL-R-10W -xxxxK - xxD - x - xx

CCT	Beam	Finish	ND-Non Dimming
3000K	25°	B	DI-Dimming
4000K	36°	W	
6000K	55°		

HL-LTG-I-FDL-CATEL-R-10W-4000K-55D-W-ND

Electrical Data

Driver Inc.	Yes
Dimming/Dimming option	No/Phase cut Constant
Driver type	Current
PF	>0.9
THD	≤ 20%

Mechanical Data

Diameter	80mm
Height	55mm
Cut Out	75mm
Material	Dicast Aluminum
Fixed/Adjustable	Fixed
Adjustable angle	Nil
Finish	White/Black

Optical Data

Chip	CREE
Beam Angle	25°, 36°, 55°
SDCM(Macadam step)	< 3
CRI	>80 +
CCT	3000K/4000K/6000K
Life Span	50000Hrs
Luminaire Efficiency(lm/W)	90lm/W
Luminaire Lumen(lm)	900lm

Thermal Data

Working Temperature	-20° C to 45° C
Storage Temperature	-20°C to 60°C


Safety Data

IP	IP20
IK	IK07
Safety Class	Class II
CE	YES
ROHS	YES

Photometrics

HL-LTG-I-FDL-CATEL-R-10W-4000K-55D-W-ND

LED Light Engine: 4000K, 80 CRI System Wattage: 10W
Fixture Delivered Lumens: 900lm Fixture Efficacy: 90lm/W

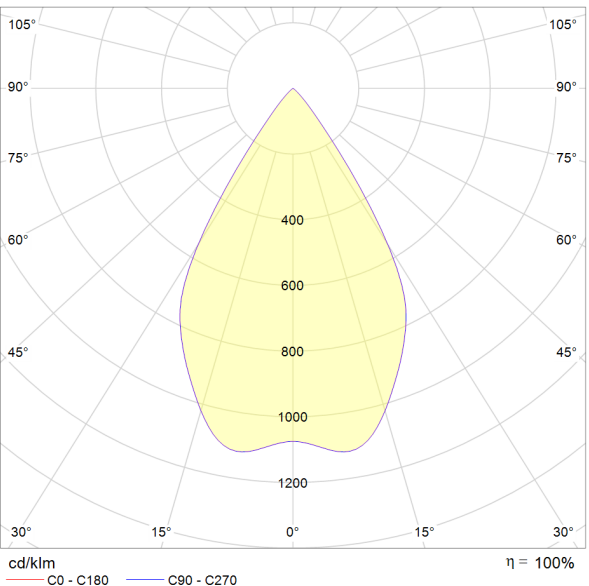

Cone Diagram

0.5	0.61	E(0°) E(C0)	31.2°	15050 4902
1.0	1.21	E(0°) E(C0)	31.2°	3763 1225
1.5	1.82	E(0°) E(C0)	31.2°	1672 545
2.0	2.42	E(0°) E(C0)	31.2°	941 306
2.5	3.03	E(0°) E(C0)	31.2°	602 196
3.0	3.63	E(0°) E(C0)	31.2°	418 136

Distance [m] Cone Diameter [m] Illuminance [lx]

***Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. ***Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.